



REMCO MEASUREMENT SHEET

Fax Cover Sheet

Date:_____

To: REMCO DSC

Fax: 855-839-2924

From:_____ Fax:_____ PO:_____

Name / Company:_____

Shipping Address:_____

City:_____ State:_____ Zip:_____

Person Ordered By:_____

Email:_____ Phone:_____

Directions (Complete each step 1 through 6):

It's important to measure this vehicle UNLOADED, on level ground or on a drive on lift.

- 1) Complete the vehicle information section below.
- 2) Check mark the "SKU #" (on page 2) that matches your drive shaft assembly.
- 3) In the marked "SKU" box, enter the measurements (in inches) on the provided lines.
- 4) After filling in the appropriate "SKU" box go to the box titled "IMPORTANT" and enter u-joint cap measurements.
- 5) Check the "Remco Notes" box for your application.
- 6) Fax to REMCO DSC at 855-839-2924 or email to sales@remcodsc.com

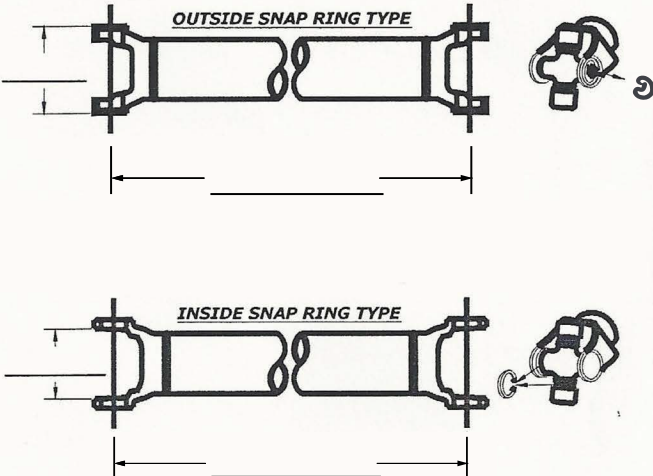
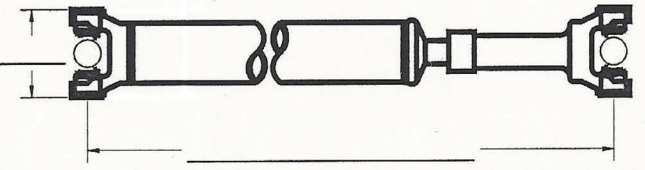
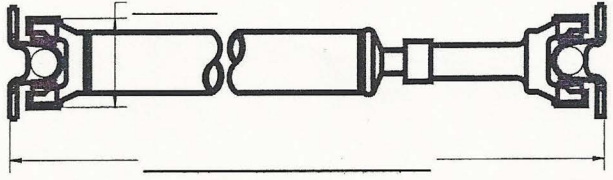
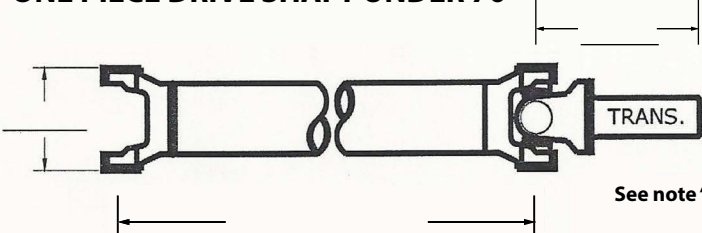

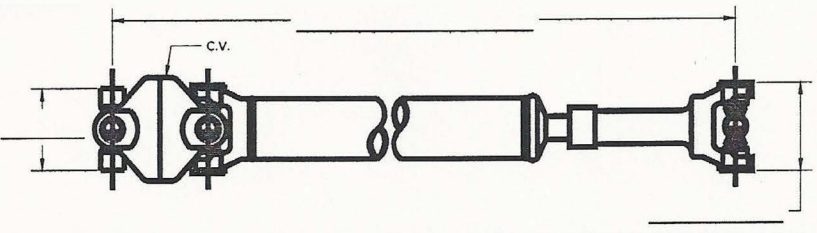
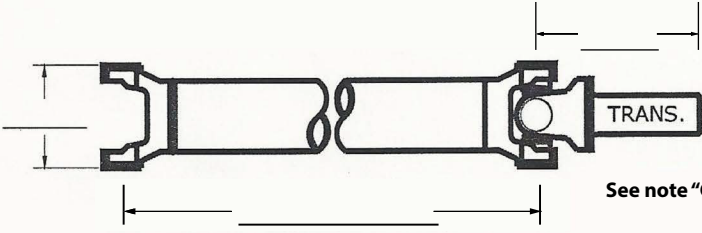
Year:_____ Make:_____ Model:_____

Engine:_____ V.I.N. (Vehicle Identification Number):_____

- | | | | |
|----|------------------------------------|---------------------------------|------------------------------|
| 1) | <input type="checkbox"/> Car | <input type="checkbox"/> SUV | <input type="checkbox"/> Van |
| 2) | <input type="checkbox"/> Pickup | Cab Style _____ | |
| 3) | <input type="checkbox"/> Automatic | <input type="checkbox"/> Manual | |
| 4) | <input type="checkbox"/> 2WD | <input type="checkbox"/> 4WD | |

REMCO DRIVE SHAFT COUPLING MEASUREMENT SHEET

COMPANY PLACING THE ORDER: _____

<p>SKU-1 ONE PIECE DRIVE SHAFT</p> 	<p>SKU-2 DRIVE SHAFT WITH SLIP</p>  <p>SKU-3 DRIVE SHAFT WITH SLIP & FLANGES</p> 
<p>SKU-4 ONE PIECE DRIVE SHAFT UNDER 70"</p> <p>May have u-joint flange at differential. See note "D"</p>  <p>See note "C"</p>	<p>*IMPORTANT* EACH SKU # MUST HAVE U-JOINT CAP MEASUREMENT.</p> 
<p>SKU-5 DRIVE SHAFT WITH CONSTANT VELOCITY U-JOINTS</p> 	<p>REMCO NOTES</p> <p>A. ALL TOYOTA'S 2005 AND OLDER: FRONT AND REAR FLANGE BOLT PATTERNS (2 3/8" OR 2 5/8") MUST BE MEASURED</p> <p>B. VEHICLES WITH A CARRIER BEARING: MEASURE REAR DRIVE SHAFT USING SKU-1 THROUGH SKU-3.</p> <p>C. SKU-4 & SKU-6 1) MEASURE SLIP YOKE FROM CENTER OF U-JOINT TO TIP OF SLIP YOKE. 2) MEASURE OUTSIDE DIAMETER OF SLIP WITH CALIPERS. 3) MEASURE INSIDE MAJOR DIAMETER OF SLIP WITH CALIPERS. 4) COUNT THE SPLINES IN SLIP. DOES SLIP HAVE ANY WIDE SPOTS?</p> <p>D. SKU-4 & SKU-6 1) IF THE DRIVE SHAFT HAS A REAR FLANGE, MEASURE PILOT DIAMETER. IS PILOT MALE OR FEMALE? 2) MEASURE BOLT PATTERN DIAGONALLY, CENTER TO CENTER ON HOLES.</p>
<p>SKU-6 ONE PIECE ALUMINUM DRIVE SHAFT OVER 70"</p> <p>May have u-joint flange at differential. See note "D"</p>  <p>See note "C"</p>	<p>INFORMATION FOR ABOVE NOTES</p>

Remco DSC Office
4060 Dixon Street
Des Moines, IA 50313

Phone: 1-855-44REMCO
Fax: 1-855-839-2924
www.remcodsc.com