




ecoHITCH

Designed Specifically For Your **Green Vehicle**

X7350 - Subaru Impreza Hatchback

350 lb. Tongue Weight/3,500 lb. Towing Weight

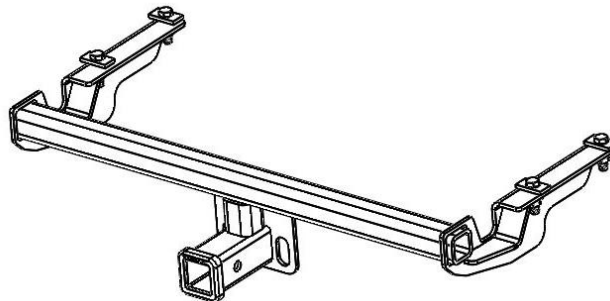

Torklift Central

315 Central Ave N

Kent, WA 98032: 253-854-1832

www.torkliftcentral.com: support@torkliftcentral.com

Version: 3 By: RS Date: 12/11/17

Stay Connected



torkliftcentral



torkliftcentral



tlcentral











torklift central



torklift central

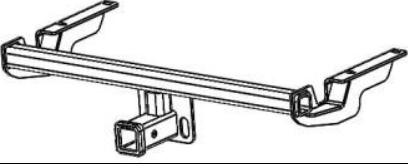

Parts Inventory

Item Image	Item Description	Item #	Quantity
	X7350 – Subaru Hitch	X7350-W1	1
	1/2"-13 x 2" - Grade 8 Hex Bolt	3659	4
	1/2" - SAE Flat Washer	7465	8
	1/2" – Split Lock Washer	9302	4
	1/2"-13 – Grade 8 Hex Nut	1751	4
	1/2" Internal Tooth Washer	14084	4
	1" x 2" Plate Washer	10859	4
	1/2" Bolt Fisher	3818	1

Installation Notes:

Step 1:

Remove plastic covers and bolts from tail light assemblies and carefully pull towards the rear of the vehicle to unsnap. Then unplug the electrical connectors.

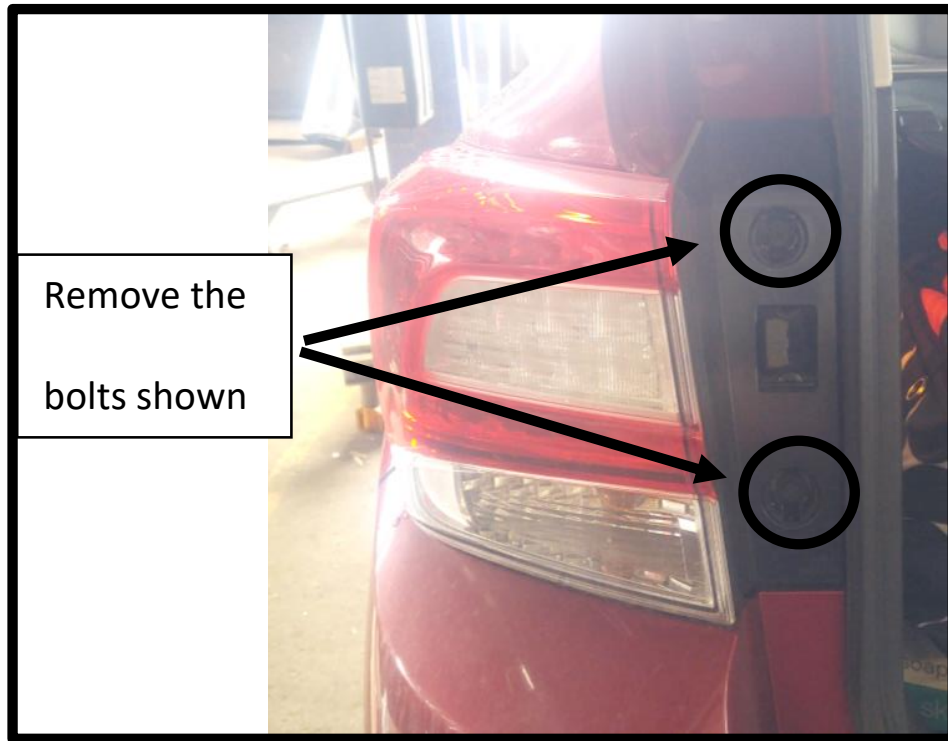


Figure 1.1

Step 2:

Remove the push clips in the wheel well felt shown in Figure 2.1. Then remove the push clips on bottom of the bumper fascia as shown in Figure 2.2. Extract the push-In clips that connect the bumper fascia to the body as shown in figure 2.3. Once removed begin to gently peel back bumper fascia starting at the passenger side wheel well working your way around to the back and finally to the driver side. **DO NOT USE EXCESSIVE FORCE.** Non-warrantied damage may occur.

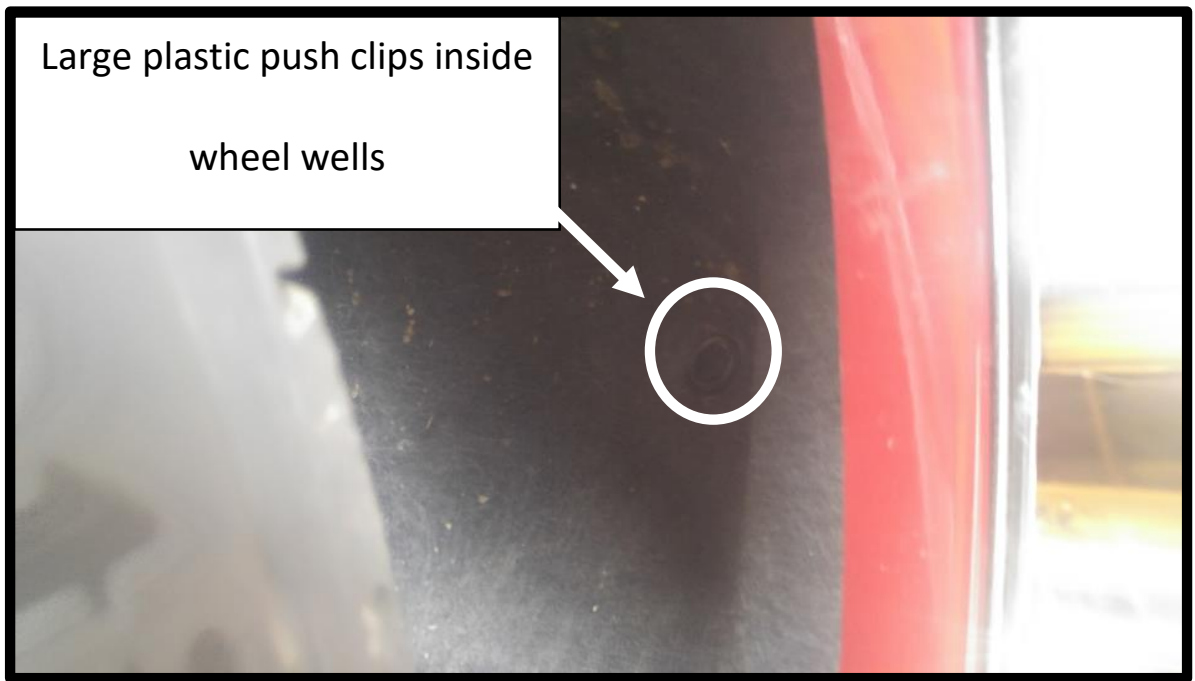


Figure 2.1



Figure 2.2



Figure 2.3

Step 3:

When the bumper is off remove the six of the crash bar bolts and nuts as shown in figure 3.1. Then take out both plastic push-In clips and slide the bumper hanger brackets up and out as shown in figure 3.2.

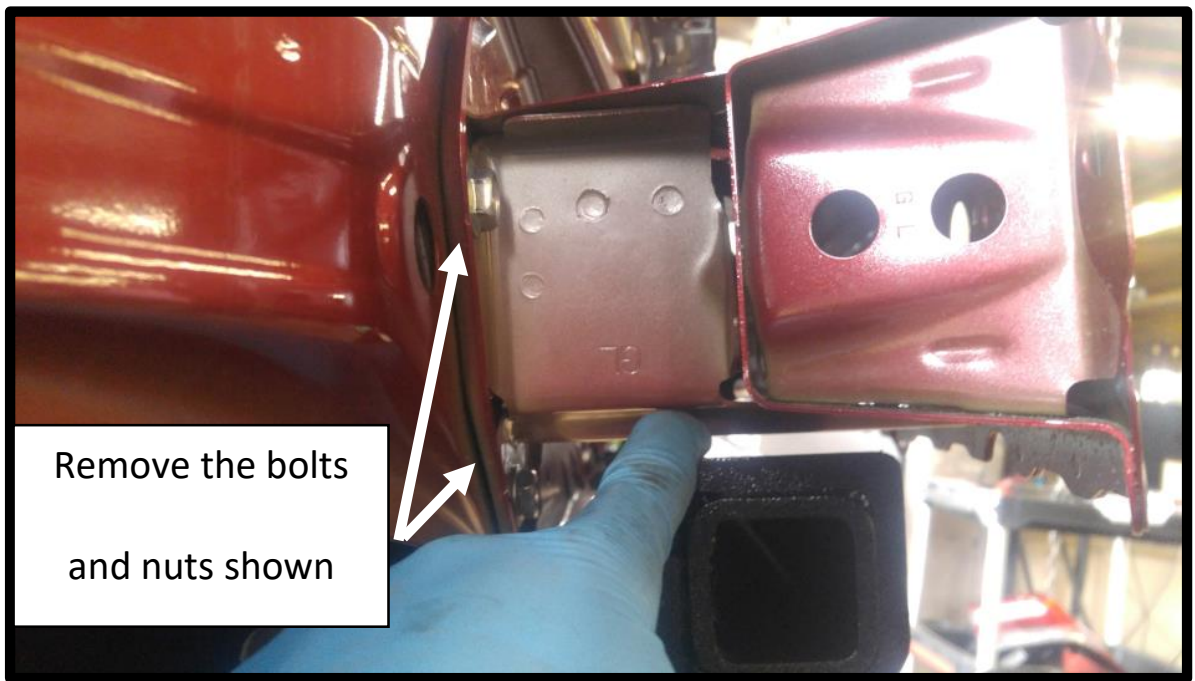


Figure 3.1

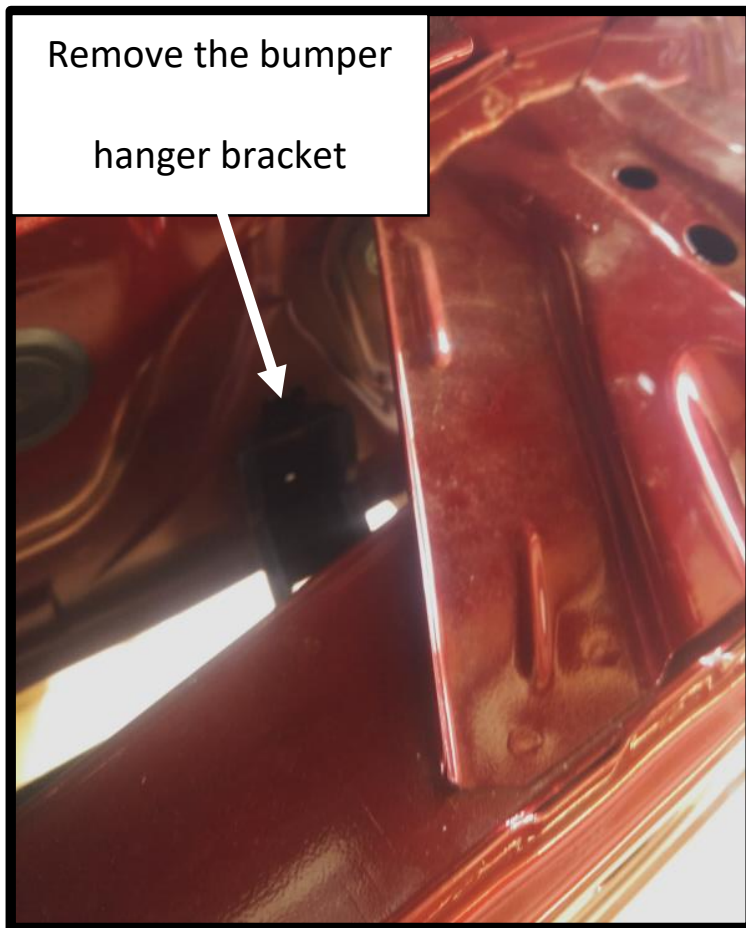


Figure 3.2

Step 4:

Use WD-40 lubricant on four of the rubber exhaust hangers to let the exhaust rest below the vehicle. The rear exhaust hanger is shown in figure 4.1 and the front brackets are shown in figure 4.2. Be sure to support exhaust with a block of wood or another stand. Do not let exhaust hang freely.

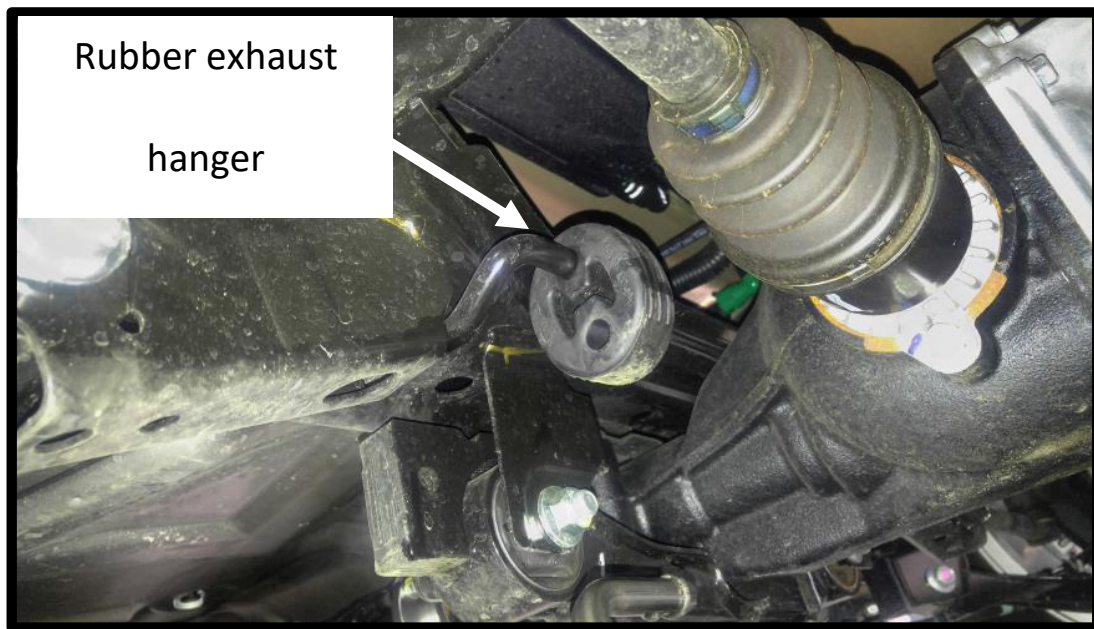


Figure 4.1

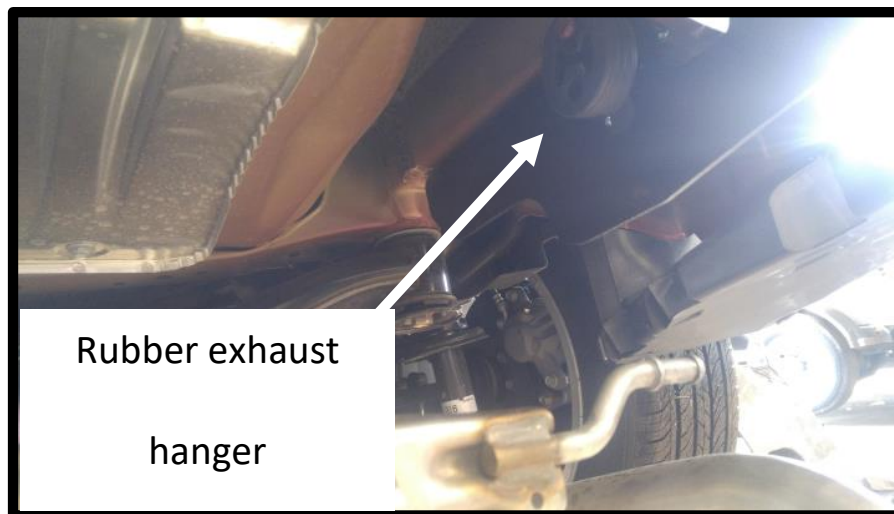


Figure 4.2

Step 5:

Remove four rubber plugs (two on driver and passenger side each) in frame rails on underside of vehicle as shown in figure 5.2. Attach a 1/2"-13 x 2" Grade 8 bolt, 1/2" Internal tooth washer and a 1" x 2" plate washer to the 1/2" bolt fisher as shown in figure 5.3. Insert the pointed end through the large hole shown in figure 5.1, pull through the small holes shown in Figure 5.2. Remove the bolt fisher and repeat on all four holes as shown in figure 5.2.

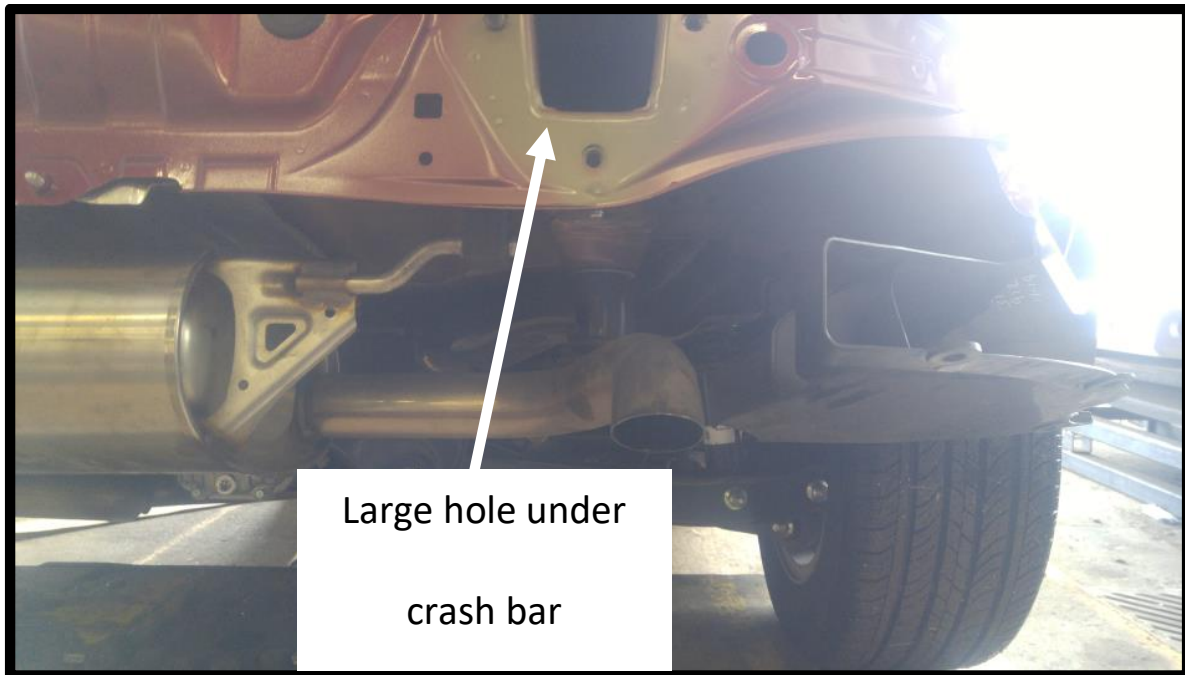


figure 5.1

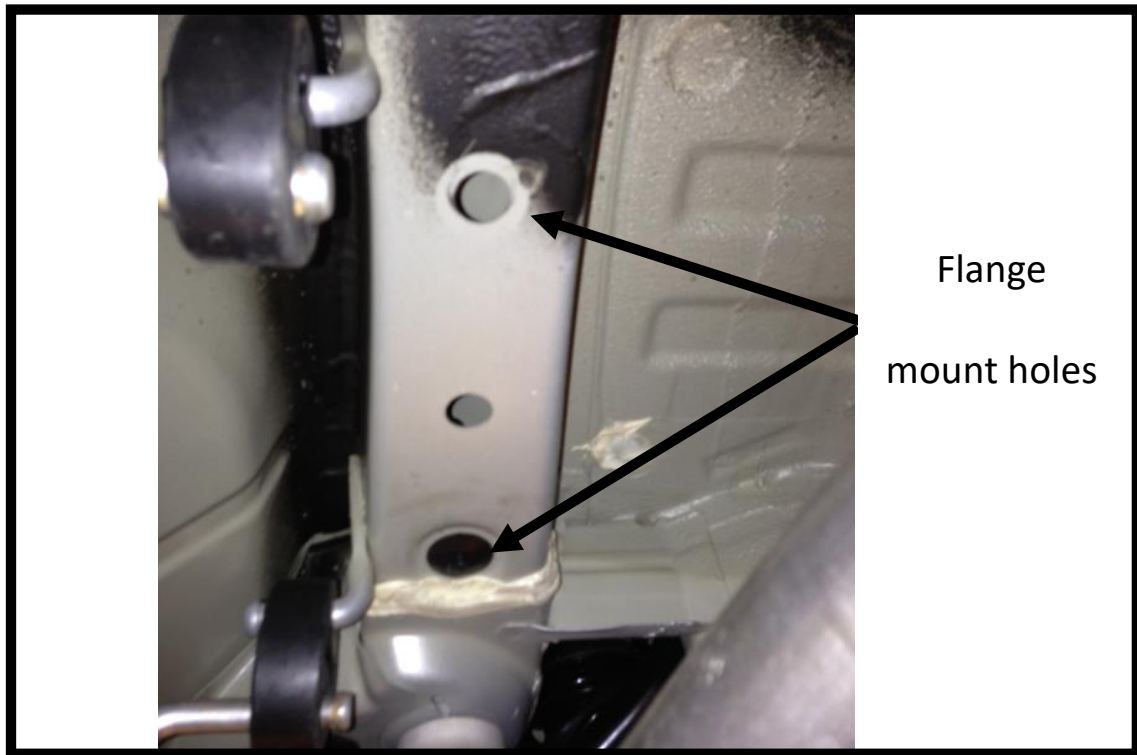


Figure 5.2

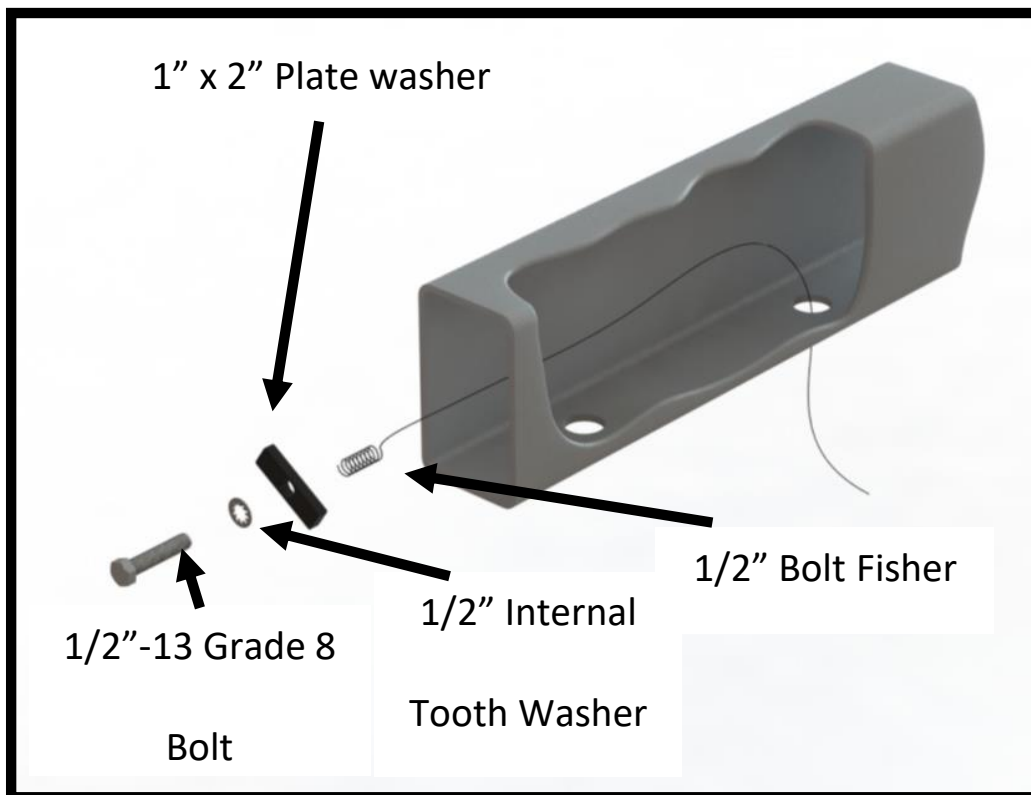


Figure 5.3

Step 6:

Slide the hitch into position and secure two 1/2" washers, one 1/2" split lock washer and 1/2" nut on each bolt. Once hitch is secured and centered on vehicle, torque all hardware to 75 ft-lbs.



Figure 6.1 (Driver side shown)

Step 7:

Reinstall the crash bar and rubber exhaust hangers. Reinstall the Bumper hanger brackets and secure using the push-in clip on both sides. The completed rear should look like figure 7.1.



Figure 7.1

Step 8:

Locate the center of the bottom of the bumper fascia and mark a square that is 2-1/2" deep and 2-1/2" - 3" wide centered as shown in Figure 8.1.

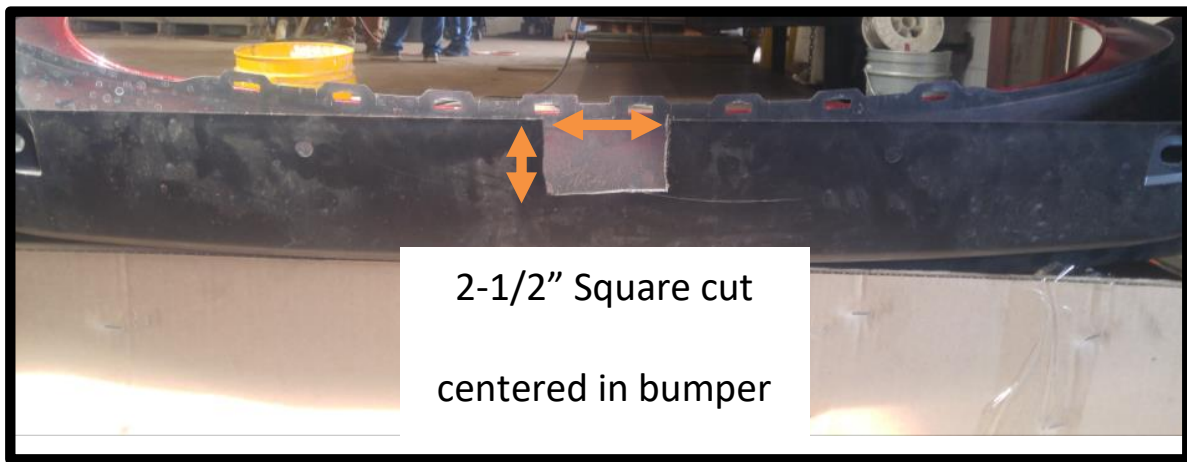


Figure 8.1

Step 9:

Place the bumper on the car and make sure that there is enough clearance in the cut out. When the bumper lines up with all the holes and cut-outs gently snap in both sides of the bumper fascia.

Step 10:

Finish by reinstalling the plastic push-in snaps in their original locations under the bumper and in the wheel well.

Step 11:

Reinstall the light assemblies and snap in the bolt covers with the wide section linking as shown in figure 11.1.

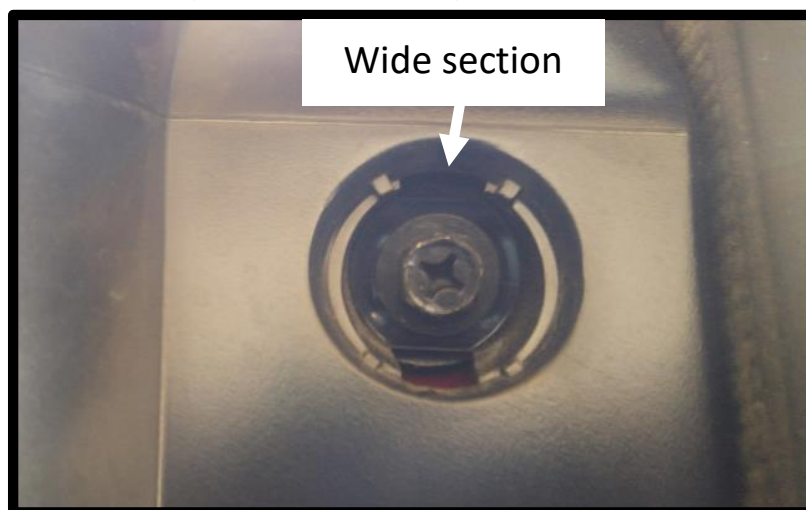


Figure 11.1

WARRANTY/DISCLAIMER

INFORMATION

Torklift Central requires proof of purchase for warranty claim registration, with pictures of any defective product before issuing a replacement. Torklift will not accept claims on any product without proof of purchase, which can be faxed, scanned, emailed or mailed to the information provided below. Torklift Central warrants its hitches, custom hitch receivers and accessories (excluding electrical wire harnesses which carry a warranty from their specified manufacturer) from date of purchase against defects in material and workmanship under normal use and service for the ownership life of the original consumer purchaser. Torklift Central will replace free of charge any part that proves defective in material or workmanship when presented to Torklift Central, transportation charges prepaid by purchaser, at the address below. **This warranty is limited to defective parts replacement only. Labor charges and/or damage incurred in installation or replacement, as well as incidental and consequential damages connected therewith are excluded.** This warranty does not include normal wear and tear or the finish and paint. Rusting, cracking or peeling of the finish is also excluded. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to Torklift Central products as a result of misuse, abuse, neglect, accident, improper installation or any use violative of instructions furnished by Torklift Central will void the warranty. This warranty gives you specific legal rights and you may also have rights, which vary from state to state. With warranty service, you may be able to go to a small claims court, a state court or a federal district court.

Although Torklift Central trailer hitches are both tested and rated for towing within the specific capacity label found on each trailer hitch. Torklift Central assumes no liability for vehicle manufacturers warranty due to the use of a Torklift Central trailer hitch being used for towing behind any vehicle or using the trailer hitch in a manner that it was not designed for. Although this specific trailer hitch has a load rating, which includes trailer tongue weight, and a trailer weight

carrying capacity, Torklift Central is not responsible for the voiding of any warranty on any vehicle due to factory towing limitations. All vehicle warranties are the sole property and responsibility of the owner of the vehicle that the Torklift Central trailer hitch is installed upon. Torklift Central does not endorse towing behind any vehicle if the vehicles manufacturer states that towing is not recommended. Check your vehicle's owner's manual for the proper tow rating of your vehicle.

ADDRESS: 315 Central Ave N. Kent, WA 98032

WARNING Your vehicle may have a lower tow rating than this trailer hitch. If your vehicle's tow rating is less than the rated towing capacity on your Torklift Central trailer hitch, your trailer hitch capacity is limited to your vehicle's factory rated towing capacity.

DANGER Never exceed your vehicle's manufacturer's recommended towing capacity which may be a lower rating than this trailer hitch