



**OVER 35 YEARS OF INNOVATION, QUALITY, SAFETY.
IMPORTANT OWNER-OPERATOR INSTALLATION INSTRUCTIONS**

Part W7703



Version 2 BY: DK 11/24/2015

TECH SUPPORT (800) 246-8132

**AFTER INSTALL, PLEASE GIVE
THIS BOOKLET TO YOUR CUSTOMER**

Warning!

To prevent dangerous electrical shock, the vehicle's main battery **MUST** be disconnected before installation.

Parts Inventory

Item Image	Item Description	Quantity
	Long Wire Harness	1
	Short Wire Harness	1
	16-14 Ga. Cool Seal Butt Connector	1
	12V 25A Fuse	2
	Relay	1
	Zip Ties	15

Installation

Step 1.

Disconnect the positive terminal from the vehicle's battery. Some vehicles are equipped with two batteries. Both will need to be disconnected.

Step 2.

Install the **12v 25A Fuse** and **Relay** into the holders on the **Long Wire Harness**.


Step 3.

Install the **12V 25A Fuse** into the fuse holder on the **Short Wire Harness**

If already installed, remove the hidden power battery box to gain access to the battery.

The **Short Wire Harness** has two ring terminals on one end. Attach the ring terminal on the black wire to the negative terminal on the battery, and the other ring terminal to the positive terminal on the hidden power battery.

See figure 3.1

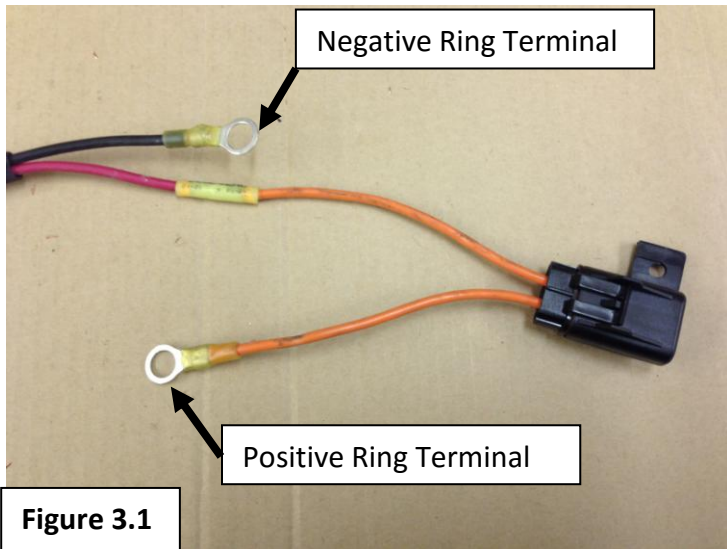

Once installed, leave the **Short Wire Harness** hanging out the side of the hidden power battery box and reinstall the hidden power onto the frame.

Step 4.

Locate the factory hitch wiring on the front side of the bumper/hitch (under the truck).

Locate the ground wire leading to the hitch plug and cut it approximately 6" from the hitch plug. Strip both ends of the ground wire.

Locate the charge wire leading to the hitch plug and cut it approximately 6" from the hitch plug. Strip both ends of the charge wire. See figure 4.1


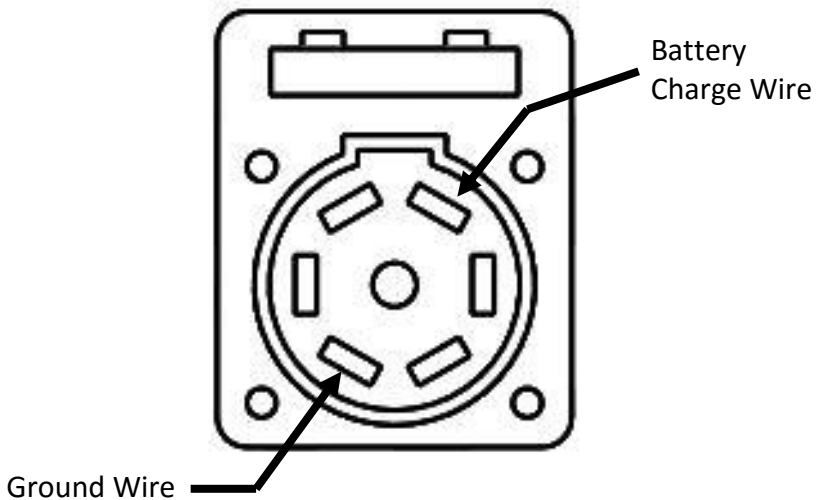


Figure 4.1 – 7- Way Hitch Plug as viewed from behind the vehicle.

Step 5.

The **Long Wire Harness** has several wires with sealed butt connectors pre crimped to their ends. See figure 5.1

- A. Connect one of the black wires to the hitch side of the cut ground wire.
- B. Connect the other black wire to the vehicle side of the cut ground wire.
- C. Connect the red wire to the vehicle side of the cut positive charge wire.
- D. Connect the blue wire to the trailer side of the cut positive charge wire.

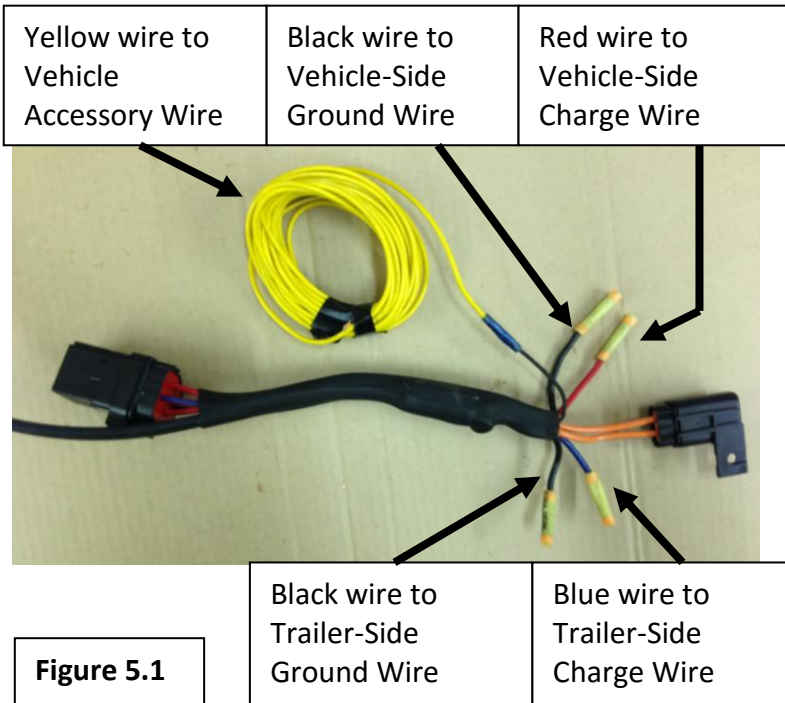

Step 6.

Once these connections are made, route the **Long Wire Harness** along the vehicle's frame towards the hidden power and the **Short Wire Harness**. Take care to avoid any moving parts or exhaust components which could abrade or melt the shielding on the wire harness.

Zip Ties have been included to aide in securing the **Long Wire Harness** to the frame. Any extra wire can be coiled up and zip tied to the frame.

Use the 50A connectors to connect the **Long Wire Harness** to the **Short Wire Harness**.

Step 7.

Connect the Yellow wire from the **Long Wire Harness** to a positive accessory wire (only powered when the key is in the on position) on a circuit providing at least 10 amps. Excess wire can either be removed or coiled.

Operation

With the vehicle's key in the "off" position, the vehicle's batteries are isolated from the Hidden Power and trailer / camper batteries.

This will allow the Hidden Power and trailer/camper batteries to be drained without affecting the vehicle's ability to start.

Once the key is turned to the "on" position, the hidden power and trailer / camper batteries will be reconnected to the vehicle, allowing them to be charged by the alternator.

If the Hidden Power/Camper batteries are drained, DO NOT leave the key in the "on" position without starting the vehicle's engine immediately. Failure to start the vehicle promptly could drain the vehicle battery and prevent starting.

Torklift International Limited Lifetime Warranty Information

322 N Railroad Ave. Kent, WA 98032

Torklift will require proof of purchase to register, with pictures of any defective product before issuing a replacement. Torklift will not register any product without proof of purchase, which can be faxed, scanned, emailed, or mailed to the information provided below. Torklift warrants its hitches, custom hitch receivers, frame mounted tie downs, turnbuckles, and accessories (excluding wire harnesses which carry a 90 day warranty) from date of purchase against defects in material and workmanship under normal use and service for the ownership life of the original consumer purchaser. All plastic, rubber, and/ or electrical components maintain a warranty of up to one year from the date of the purchase. **ALL COMMERCIAL APPLICATIONS ARE WARRANTED FOR A PERIOD OF 90 DAYS FROM THE DATE OF INSTALLATION/SERVICE.** Torklift will replace **FREE OF CHARGE** any part which proves defective in material or workmanship when presented to Torklift, **TRANSPORTATION CHARGES PREPAID** by purchaser, at the address above. **THIS WARRANTY IS LIMITED TO DEFECTIVE PARTS REPLACEMENT ONLY. LABOR CHARGES AND/OR DAMAGE INCURRED IN INSTALLATION OR REPLACEMENT, AS WELL AS INCIDENTAL AND CONSEQUENTIAL DAMAGES CONNECTED THEREWITH ARE EXCLUDED.** This warranty does not include the finish or paint on our products. Rusting, cracking or peeling of the finish is also excluded. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to Torklift products as a result of misuse, abuse, neglect, accident, improper installation or any use violative of instructions furnished by Torklift or **WHEN USED IN ANY COMMERCIAL APPLICATION WILL VOID THE WARRANTY.** This warranty gives you specific legal rights, and you may also have rights which vary from state to state. With warranty service, you may be able to go to a small claims court, a state court or a federal district court.



INTERNATIONAL

322 N Railroad Ave. Kent, WA 98032

Phone (800) 246-8132 Fax (253) 854-8003

Or visit our website: www.TorkLift.com

Dear Valued Customer,

Thank you for making TorkLift your choice for truck, camper packages and accessories for your vehicle. By choosing TorkLift products, you have chosen a company that has been serving the RV industry for nearly 40 years and whose name has become synonymous with strength, quality and advanced design and installation.

Please take a few moments of your time to complete the Product Registration Warranty Card on the next page. When registering your newly purchased TorkLift products, you can be assured that your contact information is secure and that you and your product are getting the attention and respect that you deserve.

Thank you again for choosing TorkLift quality products.

**Register for your lifetime warranty and receive a free
Torklift International gift.**

To Fax: Send copies of the questionnaire, warranty card and receipt to
253-854-8003

To E-mail: Send copies of the questionnaire, warranty card and receipt to
warranty@torklift.com

To Mail: Send to Torklift International 322 N Railroad Ave. Kent, WA 98032



OFFICIAL WARRANTY REGISTRATION CARD

PLEASE FILL OUT THIS FORM COMPLETELY AND RETURN TO TORKLIFT WITHIN
30 DAYS OF PURCHASE ACCOMPANIED BY A COPY OF YOUR ORIGINAL RECEIPT

1. PART(S) PURCHASED

TODAY'S DATE: _____

PART #: _____ PART #: _____
PART #: _____ PART #: _____
PART #: _____ PART #: _____

2. PURCHASER INFORMATION

NAME: _____
ADDRESS: _____

CITY: _____ STATE: _____ ZIP / POSTAL CODE: _____
PHONE: (____) _____ - _____ EMAIL: _____

3. TRUCK INFORMATION

YEAR: _____ MAKE: _____
MODEL: _____ BED LENGTH: _____

4. CAMPER INFORMATION

YEAR: _____ MAKE: _____ MODEL: _____

5. DEALER INFORMATION

PURCHASED FROM: _____
ADDRESS: _____

CITY: _____ STATE: _____ ZIP / POSTAL: _____
INSTALLED BY: _____ OWNER ABOVE DEALER ANOTHER DEALER

IF ANOTHER DEALER, WHO: _____