


# TWO BIKE RAIL RACK

## The Cross Country "XC"

### INSTRUCTIONS:

1. Unfold the two side arms as shown (diagram 1) and insert the lynch pins. Ensure that the pins are all the way in.
2. Slide the 4 wheel holder trays on to the bottom arms alternating the direction of the trays (diagram 2). Do not tighten them at this time, as they will have to be adjusted to fit each bike that you are carrying.
3. Slide the hooks onto the upright portion alternating the direction (diagram 2).
4. Insert the square receiver bar into the 2" square section at the bottom of the rack and insert the 1/2" pin and clip (diagram 2).
5. Tighten the two set-screws to secure the receiver bar tight against the square section. Check the set-screws periodically to ensure they are tight.
6. Insert the plastic assembly with the nut, inside the receiver bar as shown.
7. Put 5/8" threaded pin through the hole on receiver and tighten. Install clip on opposite side.

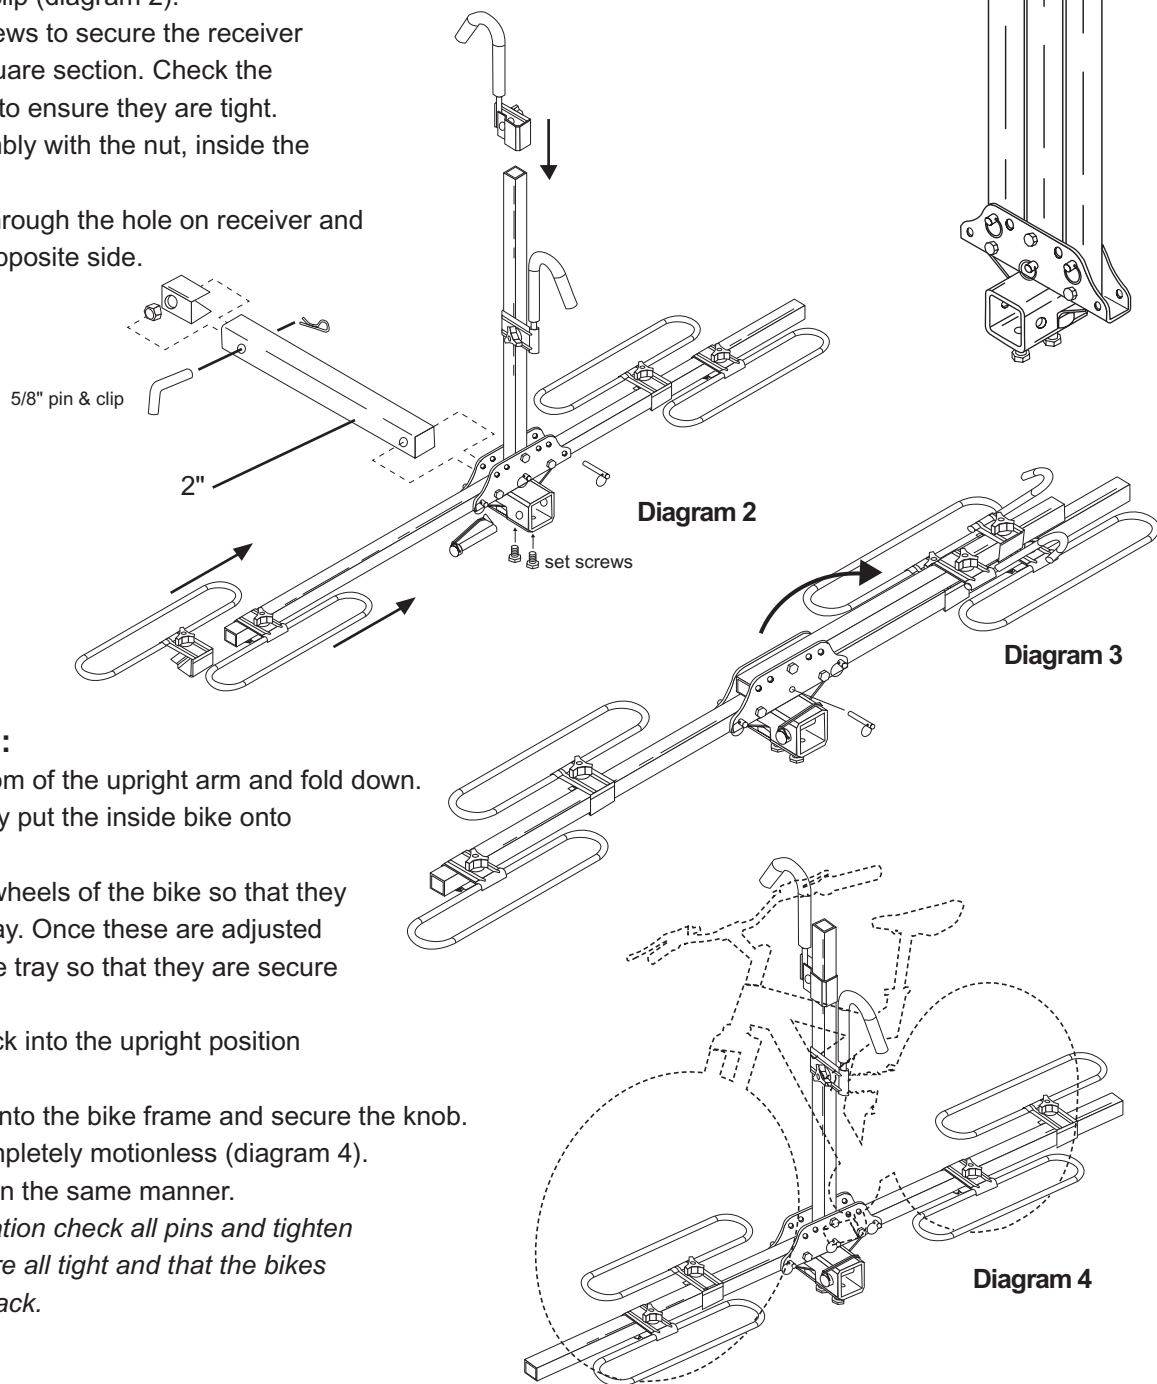

### BIKE INSTALLATION:

1. Pull the pin on the bottom of the upright arm and fold down. This allows you to easily put the inside bike onto the rack (diagram 3).
2. Adjust the trays to the wheels of the bike so that they are all the way in the tray. Once these are adjusted tighten the knobs on the tray so that they are secure and cannot slide.
3. Fold the upright bar back into the upright position and insert the pin.
4. Slide the hooks down onto the bike frame and secure the knob. The bike should be completely motionless (diagram 4).
5. Install the outside bike in the same manner.

*\* After complete installation check all pins and tighten knobs to ensure they are all tight and that the bikes are motionless on the rack.*