




Installation Instructions

Application Fits
2014-2015 Mazda 3 Sedan
X7303 & X7304

2" & 1.25" EcoHitch Stealth

200 lb. Tongue Weight/ 2,000 lb. Towing Weight

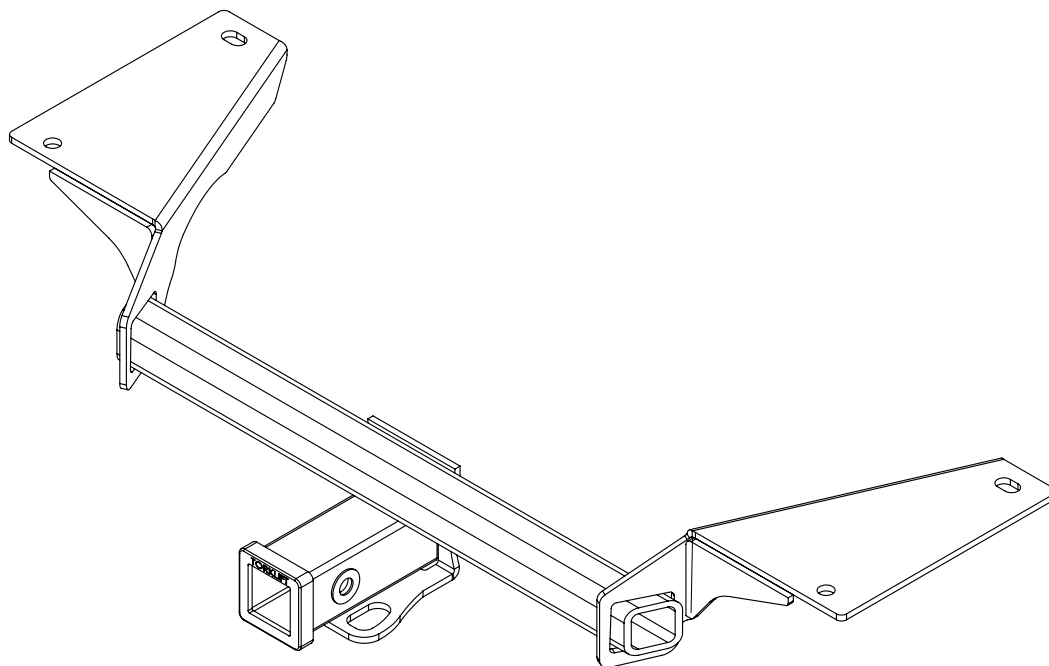

Stay Connected



torkliftcentral



torkliftcentral



tlcentral



torklift central



torklift central

Torklift Central
315 Central Ave N
Kent, WA 98032
253-854-1832

www.torkliftcentral.com
support@tlcentral.com



Bolt Kit Weight: 683g +/-

Hardware Included

QTY Fastener

- 8 1/2" Flat Washer
- 4 1/2" Lock Washer
- 4 1/2"-13 Gr.5 Hex Nut
- 4 1/2"-13 x 2" Gr.5 Carriage Bolt
- 4 1/2"SQ x 1" x 3" Carriage Plate Washer
- 1 1/2" Bolt Fisher
- 1 10" Trim-Lok

READ THESE INSTRUCTIONS THOROUGHLY AND ACCOUNT FOR ALL HARDWARE LISTED BEFORE BEGINNING INSTALLATION!


Step 1. Raise vehicle on suitable jack stands or hoist.

Step 2. Lower the exhaust by lubricating the (4) rubber exhaust bungs with a lubricant such as WD-40 or equivalent. See Figure [1] & [2].

WARNING: Support exhaust with a stand, wood block, or wire to avoid non-warranted damage. **Do not let hang freely!**




Step 3. Feed the coil end of the 1/2" bolt fisher through Hole B in Figure [3] and out of Hole A on the driver side.

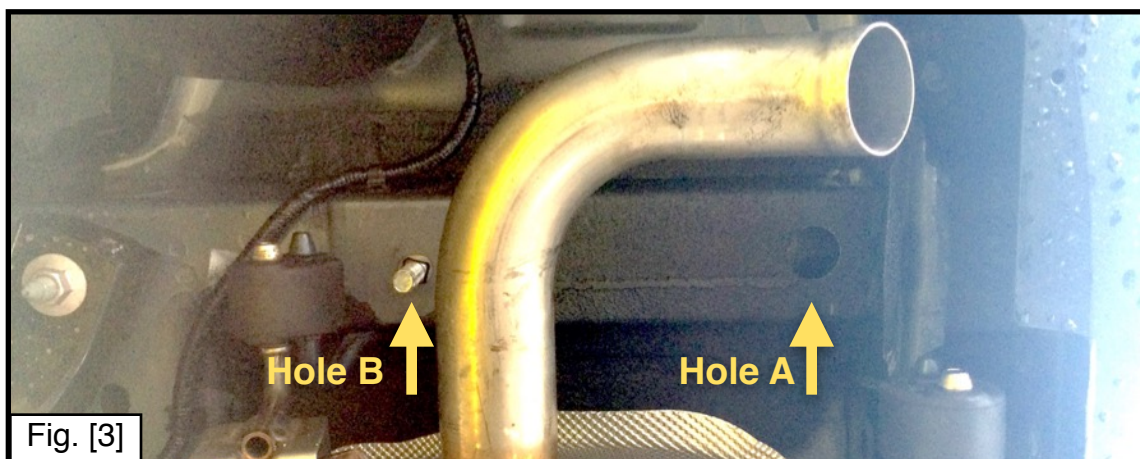


Step 4. Attach the 1/2"SQ Carriage Plate Washer and 1/2"-13 x 2" Carriage Bolt to the coil end of the bolt fisher and pull through into place in Hole B. Attach another Carriage Bolt and Carriage Plate Washer to the 1/2" bolt fisher and feed the hardware one at a time into Hole A. Once each component is through Hole A, pull on the bolt fisher to put the assembly into place. Repeat Step 4 and 5 on Passenger Side.

NOTE: It may be easiest to first feed the plate washer through Hole A once the hardware assembly is attached to the bolt fisher and then pull the bolt into place.

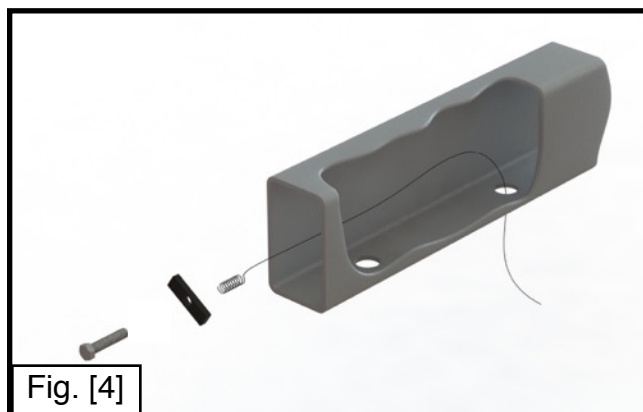

Step 5. Mark and trim a 3" x 2-1/4" cutout at the center of the bumper fascia. The closest reference point to find center should be 16-5/8" off to the left or right of the cutout edge. Apply the supplied Trim-Lok and cut excess to fit. See Figure [4].

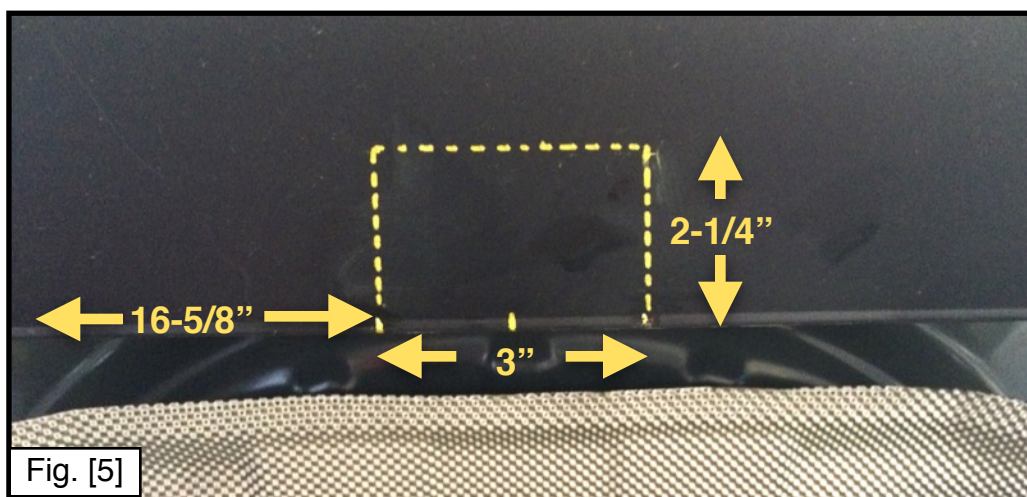

Step 6. Once you have trimmed the bumper fascia and installed your hardware, raise the EcoHitch into position on the bolts. Be careful not to push the bolt hardware back in to the frame. Once the hitch is in place, secure each bolt with (2) 1/2" flat washers, (1) 1/2" lock washer, and (1) 1/2" hex nut and hand tighten. Once all hardware has been secured and hitch is centered, torque all 1/2" hardware to 64 ft-lbs.

Step 7. Rehang the (4) rubber exhaust bungs. To ease installation you can re-lubricate the rubber bungs with WD-40.

Congratulations on the completed installation of the Mazda 3 Sedan Stealth EcoHitch! It is designed with a lifetime warranty for a lifetime of enjoyment. If you have any questions or suggestions please contact our tech support at support@tlcentral.com or by phone at (253) 854-1832.



WARRANTY/DISCLAIMER INFORMATION

Torklift Central requires proof of purchase for warranty claim registration, with pictures of any defective product before issuing a replacement. Torklift will not accept claims on any product without proof of purchase, which can be faxed, scanned, emailed or mailed to the information provided below. Torklift Central warrants its hitches, custom hitch receivers and accessories (excluding electrical wire harnesses which carry a warranty from their specified manufacturer) from date of purchase against defects in material and workmanship under normal use and service for the ownership life of the original consumer purchaser. Torklift Central will replace free of charge any part that proves defective in material or workmanship when presented to Torklift Central, transportation charges prepaid by purchaser, at the address below. **This warranty is limited to defective parts replacement only. Labor charges and/or damage incurred in installation or replacement, as well as incidental and consequential damages connected therewith are excluded.** This warranty does not include normal wear and tear or the finish and paint. Rusting, cracking or peeling of the finish is also excluded. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to Torklift Central products as a result of misuse, abuse, neglect, accident, improper installation or any use violative of instructions furnished by Torklift Central will void the warranty. This warranty gives you specific legal rights and you may also have rights, which vary from state to state. With warranty service, you may be able to go to a small claims court, a state court or a federal district court.

Although Torklift Central trailer hitches are both tested and rated for towing within the specific capacity label found on each trailer hitch. Torklift Central assumes no liability for vehicle manufacturers warranty due to the use of a Torklift Central trailer hitch being used for towing behind any vehicle or using the trailer hitch in a manner that it was not designed for. Although this specific trailer hitch has a load rating, which includes trailer tongue weight, and a trailer weight carrying capacity, Torklift Central is not responsible for the voiding of any warranty on any vehicle due to factory towing limitations. All vehicle warranties are the sole property and responsibility of the owner of the vehicle that the Torklift Central trailer hitch is installed upon. Torklift Central does not endorse towing behind any vehicle if the vehicles manufacturer states that towing is not recommended. Check your vehicle's owner's manual for the proper tow rating of your vehicle.

ADDRESS: 315 Central Ave N. Kent, WA 98032

WARNING Your vehicle may have a lower tow rating than this trailer hitch. If your vehicle's tow rating is less than the rated towing capacity on your Torklift Central trailer hitch, your trailer hitch capacity is limited to your vehicle's factory rated towing capacity.

FOR EXAMPLE: the label on your Torklift Central trailer hitch states it's capacity is rated for 500 pounds tongue weight and 5,000 pounds towing weight. However your vehicle's factory rated towing capacity is limited to only 350 pounds tongue weight and 3,500 pounds towing weight. In this example your maximum towing capacity of your Torklift Central trailer hitch is limited to 350 pounds tongue weight and 3,500 pounds towing weight as stated by your vehicle's maximum factory tow rating.

DANGER Never exceed your vehicle's manufacturer's recommended towing capacity which may be a lower rating than this trailer hitch

Unsure of your tow rating? Download our towing app from the app store to find your vehicles tow rating.
www.torkliftcentral.com/app.php